

Our new pre-knurled ground rods save installers time and money.

> Pre-knurled rods cut the time for compression grounding installation in half.

While knurling increases the pullout value of a compression connection by as much as 20%, knurling in the field is time consuming. A special die is needed for the compression tool to create the knurled surface. The knurling die must then be removed and replaced to install the connector.

Galvan's knurled rods eliminate the need for additional tooling and the time required to use it, making the installation of the compression lug to the ground rod a simple one-step process.

Galvan's new knurled ground rods are completely made in the USA and meet Buy American requirements for government funded infrastructure projects. They are NESC and RUS compliant.

For more information call 704-455-5102; fax 704-455-5215; or email sales@galvanelectrical.com.



GALVAN INDUSTRIES, INC.

www.galvanelectrical.com · (704) 455-5102



Galvan Knurled Copper-Bonded Ground Rods

Made to Highest Standards for Longest Life

- · Listed to UL-467 specification.
- UL Listed rods have a 10-mil minimum (254 microns) copper plating.
- Galvan color-codes the rod end to eliminate size errors.
- Meets NEMA GR-1 standards

Knurled Ground Rods Save Time and Money

- · Pre-knurled rods eliminate need for knurling in the field.
- Reduce tooling cost; no knurling die needed (to possibly loose)
- Cuts installation time in half for compression grounding
- Reduces cost to install compression grounding

Available now in the sizes most in demand

Catalog Number	Diameter X Length
5008L-K	1/2" x 8'
5010L-K	1/2" x 10'
6258-K	5/8" x 8'
6260-K	5/8" x 10'
7508-K	3/4" x 8'
7510-K	3/4" x 10'
1010-K	1" x 10'







For more information, or to place an order, contact Galvan Industries at (704) 455-5102. Visit Galvan online at **www.galvanelectrical.com.**
















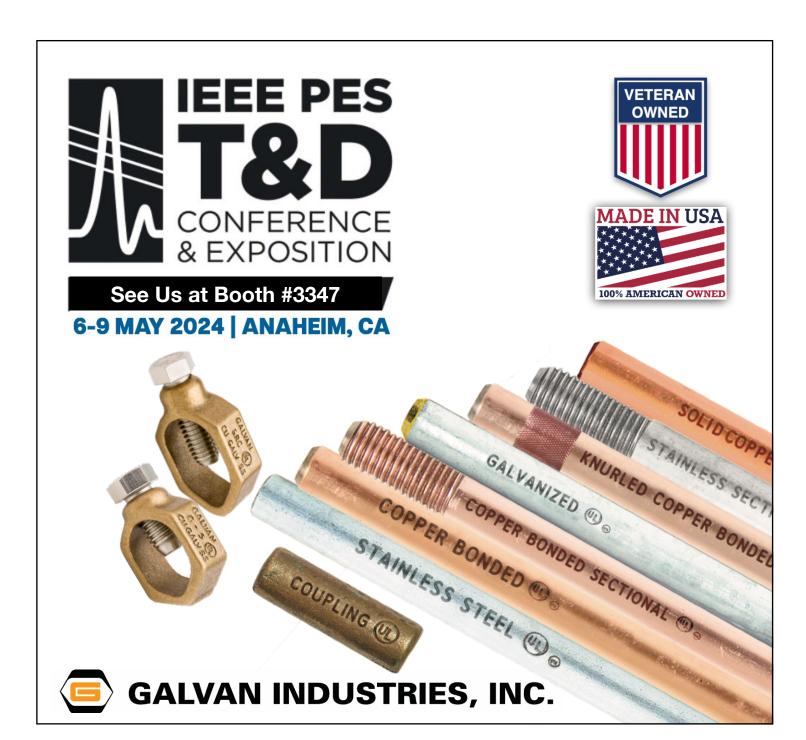





Galvan Knurled Copper-Bonded Ground Rods

Made to Highest Standards for Longest Life

- · Listed to UL-467 specification.
- UL Listed rods have a 10-mil minimum (254 microns) copper plating.
- · Galvan color-codes the rod end to eliminate size errors.
- · Meets NEMA GR-1 standards



Our new pre-knurled ground rods save installers time and money.

Pre-knurled rods cut the time for compression grounding installation in half

While knurling increases the pullout value of a compression connection by as much as 20%, knurling in the field is time consuming. A special die is needed for the compression tool to create the knurled surface, which must then be removed and replaced to install the connector.

Galvan's knurled rods eliminate the need for additional tooling and the time required to use it, making the installation of the compression lug to the ground rod a simple one-step process

Galvan's new knurled ground rods are completely made in the USA and meet Buy American requirements for government funded infrastructure projects. They are NESC and RUS compliant.

For more information call 704-455-5102; fax 704-455-5215; or email sales@galvanelectrical.com.









GALVAN INDUSTRIES, INC.

www.galvanelectrical.com · (704) 455-5102





